

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 229 183 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
07.08.2002 Bulletin 2002/32

(51) Int Cl.7: **E04F 15/10**

(21) Application number: 99958193.7

(86) International application number:
PCT/ES99/00384

(22) Date of filing: 25.11.1999

(87) International publication number:
WO 01/33011 (10.05.2001 Gazette 2001/19)

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

(72) Inventor: **CRUZ GARCIA, Eugenio**
E-46700 Gandia (ES)

(30) Priority: 05.11.1999 ES 9902432

(74) Representative: **Röthinger, Rainer**
c/o Wuesthoff & Wuesthoff
Patent- und Rechtsanwälte
Schweigerstrasse 2
81541 München (DE)

(71) Applicant: **Industrias Auxillares Faus, S.L.**
46700 Gandia (ES)

(54) NEW DIRECT LAMINATED FLOOR

(57) New direct laminated floor, of the kind that contain, on their surface, cellulose sheets impregnated in polymerisable resins, on which some characteristics have been drawn and where, once pressed and mech-

anized, the finished strips have an offset/sunk area on the peripheral edge and the optic/tactile texture of the surface corresponds and adapts to the characteristics drawn on the cellulose sheets.

For application in the construction industry.

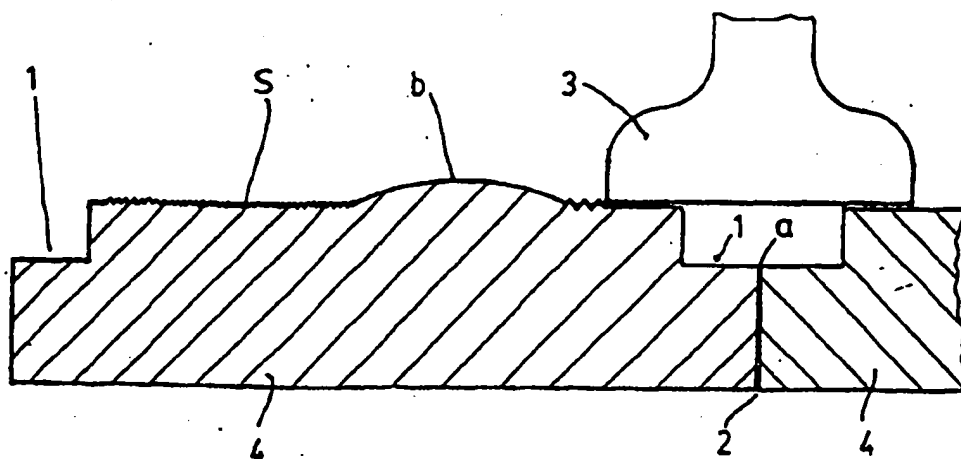


Fig. 3

EP 1 229 183 A1

Description

[0001] Well known for some time has been the use of cellulose sheets (papers) impregnated in phenol or melamine resins and others, which, together with wooden boards or panels, plus some other components to be defined by each manufacturer, are hot pressed and give rise to already known products, such as boards, laminated boards, panels, direct laminated floors, etc. all of which are intended to imitate wooden, ceramic, natural stone coverings, etc. mainly for floors.

[0002] If melamine has been used and the product is going to have a single work surface (for example for floors), the melaminized board, that comes from the press with a surface area that generally varies between 3 and 8 square meters, is mechanized, that is, it is cut into pieces (strips) of approximately 1,200 x 200 mm. Each piece is tongued and grooved and is then ready for installation, achieving decorative and resistant paving, which imitates wooden, ceramic or natural stone paving.

[0003] This product has two defects:

1. It is not resistant to wear.
2. A good imitation of the natural product (ceramic, wood, etc.) it attempts to imitate is not achieved.

[0004] The applicant has investigated into the reason why parts, that is, tiles, strips, boards, thus manufactured and used as paving are not very resistant to wear. It has been seen that premature aging begins around the edges of the perimeter of these parts, along the tongued and grooved line of the parts.

[0005] The products known to date have an even surface texture, so the user, the pedestrian, treads equally (the sole of his shoe makes contact) on the center of a tile as on the edge, and as this perimetral edge is, due to its actual structure, the weakest area, that area is the one that deteriorates first.

[0006] One object of the invention is to overcome this problem on deciding that the product (tile, strip, board, etc.), which has a polygonal shape, normally a rectangle or square, should have bas-relief around the perimeter, that is, the edge contour should be a few tenths of a millimeter deeper than the rest of the product surface, so when the user treads, for example, on the tile, the sole does not rest on the perimeter edge, which has no contact under the sole. Likewise the friction or wear with any other agent that is normally in contact with the paving is avoided.

[0007] The applicant has also investigated into the reason for the second defect. He has reached the conclusion that if the imitation is not suitable, this is due to its surface texture, both under the optic viewpoint and tactile viewpoint, having an erroneous design.

[0008] In the current product, the decorative effect of the surface is achieved with the design which is printed on the impregnated paper, and with the texture of the

surface which, whatever the product to be imitated, is a monotonous texture that covers the whole surface and which the press mould confers upon it.

[0009] The design represents the different identification characteristics (line, color) of the natural product which, in the natural product, have different relief, but the texture (relief) provided by the press mould, is distributed equally over the whole surface. So in the product known today, in the typical areas, which, in the natural product, have differences in level, both at sight and to the touch, this does not occur.

[0010] Another object of this invention is to overcome this problem providing the product (tile, strip, board, etc.) with a surface that is not even or monotonous, but whose texture-relief corresponds and adapts to the areas of the design printed on the papers and defined as identification characteristics of the natural product.

[0011] That is, if wood knots appear in the drawing, for example, in the final product adjusted to said design there appears (by volumetric, conceptual, physical correspondence) a highlighted area that to the eye and touch appears to be a knot. The same happens if there is a pore in the wood, the roughness of the natural stone, or the surface bubbles of ceramics, etc.

[0012] This is achieved with an exact correspondence-concordance between the image of the impregnated papers and the relief-texture of the press mould.

[0013] Thus we obtain; for example:

- a) Designs of ceramic tiles, where the unions between tiles are in bas-relief as occurs in paving made with earthenware ceramics;
- b) Wood designs where the streaks, pores, knots, etc. that the paper design has are made by making them coincide with those of the surface texture.

[0014] In short, the novelty consists in a product with a very marked surface texture and which adapts and corresponds to the design provided by the paper, achieving a much more real effect than when the surface texture is not defined and adapted to the paper design. Not only is an optical effect produced, but also the different reliefs appear in the right area and can be touched.

[0015] On the other hand we considerably increase the life of the product as the joints do not undergo wear as they are free from contact when being trod upon.

[0016] This invention advocates a new direct laminated floor, of the kind that includes cellulose sheets impregnated in polymerisable resins on its surface, on which some characteristics have been designed and of the kind that, once pressed, the finished strips have an offset/sunk area in its peripheral edge.

[0017] It is also characterized because the optic/tactile texture of the surface of the floor, once pressed, corresponds and adapts to the characteristics designed on the cellulose sheets.

[0018] In order to better understand the object of this

invention, the drawings illustrate a preferential manner of practical execution that is subject to accessory changes that do not take retract from its bases.

[0019] Figure 1 is a view of the presence of a design on the resin-impregnated papers of the product before being pressed.

[0020] Figure 2 is a view of the board product resulting from pressing the product of figure 1.

[0021] Figure 3 is an illustration according to section A:A of figure 2.

[0022] An example of a practical execution of this invention, but not a limiting one, is described below.

[0023] This type of product usually has cellulose cores impregnated in polymerisable resins such as phenols and in this case, impregnated in melarnine. The core may also have wooden sheets or other products, such as silica, to resist abrasion.

[0024] The chemical and multi-layer nature of the product is not the object of the invention.

[0025] A perimetral rim has been illustrated on the drawing (figure 1) which may even be in a different color to the rest. This rim of the design will give rise to the perimetral offset in the pressing (1) (figure 2).

[0026] The unit (4) to be placed on the paving (figure 2) has a perimetral rim (1) that is sunk respect to the rest of the surface(s) of the board and which corresponds to the joint (2) areas or connection by whatever procedure, for example, tongue and groove with the enclosed unit(s).

[0027] The (mechanized) cutting or quartering of the first board coming from the press, can be done by units (strips), for example of 300 x 300 mm or 400 x 400 mm or 600 x 600 mm, or maintaining several units joined together in blocks, for example 1,200 x 300 mm (four) or 1,200 x 400 mm (three).

[0028] In this case the board attempts to imitate ceramics so two deformities (a) (b) have been illustrated, which are normal in surfaces of this material.

[0029] Bearing in mind that the ceramic tiles are usually butt joined with a small layer of cement, it will be seen that the perimetral rim (1) successfully imitates it both to touch and visually, due to its offset and possible cement color which comes from the design of the cellulose papers.

[0030] If the user treads between tiles (4) the sole (3) of his shoe never reaches the edge (a) of the tile (4).

[0031] It can be seen that once the characteristics (a₁), (b₁) of the product to be imitated (ceramic) have been defined in the drawing (figure 1), the volume-relief-texture (in this case deformities) in the end product (a), (b) (figure 2) are in perfect positional, conceptual, physical and volumetric correspondence to said drawn characteristics (a₁), (b₁) identifying the product to be imitated.

[0032] In the specific case of the perimetral rim (1) a specific characteristic, for example, of the ceramic tiles, can be considered.

[0033] The mechanizing of the product (flooring) that

comes from the press usually consists in it being divided into units (strips) to be placed on the floor and in providing the strips (if necessary) with means of connection, for example tongue and groove, between the units themselves.

[0034] This mechanizing is not the object of the invention.

10 Claims

1. New direct laminated floor, of the kind that contain, on the surface, cellulose sheets impregnated in polymerisable resins, where some characteristics have been drawn, **characterized** because once pressed and mechanized, the finished strips have an offset/sunken area on their peripheral edge.
2. New direct laminated floor, according to the previous claim, **characterized** because the optic/tactile texture of the surface of the floor, once pressed and mechanized, corresponds and adapts to the characteristics drawn on the cellulose sheets.
3. New direct laminated floor, according to the second claim, **characterized** because the characteristics drawn and the relative texture are identifying characteristics of a natural product to be imitated.

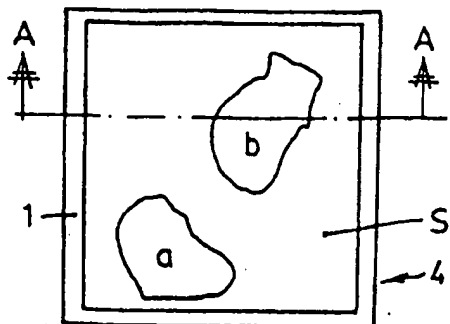


Fig. 2




Fig. 1

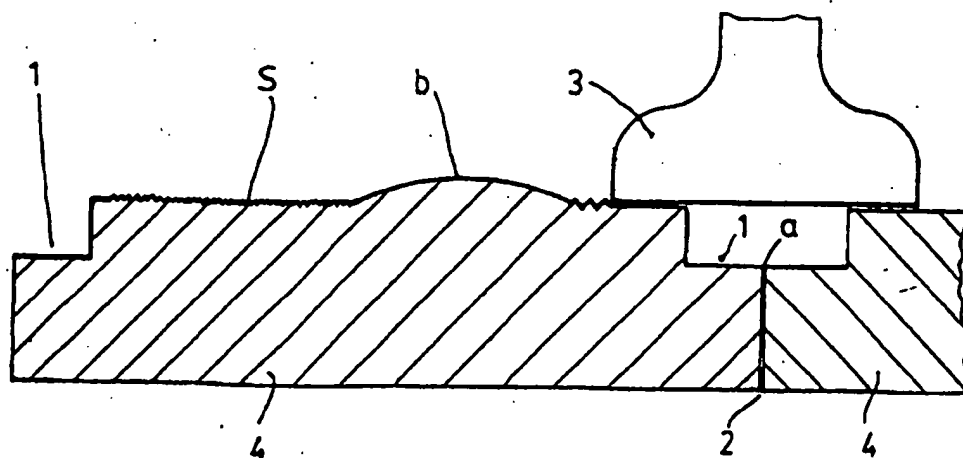


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/ES 99/00384

A. CLASSIFICATION OF SUBJECT MATTER:

IPC7 E04F 15/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 E04F 15/10; 15/02; 15/16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPODOC, WIPL, CIBEPAT,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| Y | US 2108226 A (WALTER S. JOHNSTON) 15 February 1938 (15.02.38), page 1, column 2, line 42 - page 2, column 3, line 33; page 2, column 4, line 49 - page 3, column 5, line 9; figures | 1,2,3 |
| Y | ES 460194 A (PILLADO PEREZ) 16 May 1978 (16.05.78), page 2, line 21 - page 4, line 16 | 1,2,3 |
| A | ES 163421 U (MANCEBO) 01 May 1971 (01.05.71), the whole document | 2,3 |
| A | ES 283331 U (SOCIEDAD ANONIMA TRIANGULAR DE CONSTRUCCIONES) 16 May 1985 (16.05.85), page 3, line 28 - page 4, line 23; figures | 1 |
| A | ES 1019585 U (REVESPAN, S.A.) 01 April 1992 (01.04.92) | |



Further documents are listed in the continuation of Box C



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Δ" document member of the same patent family

Date of the actual completion of the international search report
04 Januar 2000 (04.01.00)Date of mailing of the international search report
17 Januar 2000 (17.01.00)

Name and mailing address of the ISA/ S.P.T.O.

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/ ES 99/00384

| Patent document Cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 2108226 | 15.02.1938 | NONE | |
| ES 460194 | 16.05.1978 | NONE | |
| ES 163421 U | 01.05.1971 | NONE | |
| ES 283331 U | 16.05.1985 | NONE | |
| ES 1019585 U | 01.04.1992 | NONE | |

Form PCT/ISA/210 (patent family annex) (July 1992)